







ISO/IEC17025Accredited Lab.

Report No: FCC 1203056 File reference No: 2012-04-25

Applicant: FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD

Product: Two Way Radio

Model No: UV-5R

Trademark: BAOFENG

Test Standards: FCC Part 90

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4 and FCC Part 90,

regulations for the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: April 25, 2012

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1203056 Page 2 of 74

Date: 2012-04-25



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Report No: 1203056 Page 3 of 74 Date: 2012-04-25



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
6.0	Frequency Tolerance.	12
7.0	Emission Bandwidth and Mask	17
8.0	Unwanted Radiation.	37
9.0	Modulation Characteristics.	44
10.0	Maximum transmitter Power (Conducted Output Power)	50
11.0	Transmitter Frequency Behaviour	51
12.0	Radiated Emission on Receiving Mode	57
13.0	RF Exposure	60
14.0	FCC ID Label	61
15.0	Photo of Test	62

Report No: 1203056 Page 4 of 74

Date: 2012-04-25



1.0 **General Details**

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F, Block 4, Anhua Industrial Zone., No.8 TaiRan Rd. CheGongMiao, FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD

Address: CHANGFU INDUSTRIAL ZONE, XIAMEI, NNA'AN, QUANZHOU, FUJIAN, CHINA

Telephone: 00886-595-86767889 Fax: 00886-595-86753889

1.3 Description of EUT

Product: Two Way Radio

Manufacturer: FUJIAN NAN'AN BAOFENG ELECTRONICS CO., LTD

Brand Name: BAOFENG Model Number: UV-5R

Power Source Adapter Model: A-88, Input: 100-240V~0.1A 50-60Hz

Output: DC 10V-0.5A

Type of Modulation FM

Frequency range VHF Band: 136-174MHz; UHF: 400MHz-480MHz

Channel Spacing 12.5 kHz
Frequency Selection By operation

Antenna: Whip antenna with the length of 120mm and the antenna gain is 1.0dBi

Emission Designer 9K10F3E for VHF band and 9K20F3E for UHF band

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2012-03-12 to 2012-04-25

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1203056 Page 5 of 74 Date: 2012-04-25



Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Report No: 1203056

Page 6 of 74

Date: 2012-04-25



2.0 **Test Equipments** Instrument Type Date of Cal. Manufacturer Model Serial No. Due Date **ESPI Test Receiver** ROHDE&SCHWARZ ESPI 3 100379 2011-08-26 2012-08-25 **TWO** 2012-08-25 2011-08-26 ROHDE&SCHWARZ EZH3-Z5 100294 Line-V-NETW TWO 2012-08-25 2011-08-26 ROHDE&SCHWARZ EZH3-Z5 100253 Line-V-NETW 2012-08-25 Ultra Broadband ROHDE&SCHWARZ HL562 100157 2011-08-26 **ANT** 2012-08-25 2011-08-26 ROHDE&SCHWARZ **ESDV** 100008 **ESDV** Test Receiver 2011-08-26 2012-08-25 Impuls-Begrenzer ROHDE&SCHWARZ ESH3-Z2 100281 System Controller CTSC100 2011-08-26 2012-08-25 Oscillator **KENWOOD** AG-203D 3070002 2011-08-26 2012-08-25 5K VA AC Power 2012-08-25 California Instruments 5001iX 56060 2011-08-26 Source Signal Generator ROHDE&SCHWARZ SMT03 100029 2011-08-26 2012-08-25 Power Amplifier 150W1000 300999 2011-08-26 2012-08-25 AR Field probe Holaday HI-6005 105152 2011-08-26 2012-08-25 Bilog Antenna Chase CBL6111C 2576 2011-08-26 2012-08-25 00042960 Loop Antenna **EMCO** 6502 2011-08-26 2012-08-25 **ESPI Test Receiver** ROHDE&SCHWARZ ESI26 838786/013 2011-08-26 2012-08-25 Modulation Analyzer HP 8901B 3104A03367 2011-08-26 2012-08-25 3m OATS N/A2011-08-26 2012-08-25 BBHA9170265 2011-08-26 Horn Antenna **SCHWARZBECK BBHA 9170** 2012-08-25 Horn Antenna **SCHWARZBECK BBHA 9120D** 9120D-631 2011-08-26 2012-08-25 Power meter Anritsu ML2487A 6K00003613 2011-08-26 2012-08-25 Power sensor Anritsu MA2491A 32263 2011-08-26 2012-08-25 2011-08-26 9163/340 Bilog Antenna Schwarebeck **VULB9163** 2012-08-25 LISN **AFJ** LS16C 10010947251 2011-08-26 2012-08-25 LISN (Three Phase) Schwarebeck NSLK 8126 8126453 2011-08-26 2012-08-25 9*6*6 Anechoic N/A2011-08-26 2012-08-25

Report No: 1203056 Page 7 of 74

Date: 2012-04-25



3.0 Technical Details

3.1 Summary of test results

The EUT	The EUT has been tested according to the following specifications:						
	Standard	Test Type	Result				
	FCC Part 15.207	Conducted Emission	Compliant				
	ECC Dort 00 205	Maximum Transmitter	Compliant				
	FCC Part 90.205 Power		Compilant				
	FCC Part 90.207	Modulation Characteristic	Compliant				
	FCC Part 90.209	Occupied Bandwidth	Compliant				
	FCC Part 90.210	Emission Mask	Compliant				
	FCC Part 90.213	Frequency Tolerance	Compliant				
	FCC Part 90.214	Transient Frequency	Compliant				
	1 CC 1 att 90.214	Behaviour	Compliant				

3.2 The tests were performed according to following standards:

FCC Part 90 TIA/EIA 603 ANSI C63.4-2009

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 8 of 74

Report No: 1203056 Date: 2012-04-25



5. Power Line Conducted Emission Test

5.1 Schematics of the test

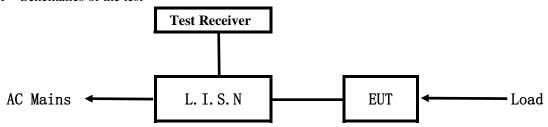


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2009.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

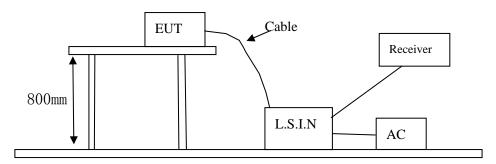

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2009. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Two Way Radio	FUJIAN NAN'AN BAOFENG	UV-5R	ZP5BF-5R
	ELECTRONICS CO., LTD		

B. Internal Device

Device	vice Manufacturer		FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1203056 Page 9 of 74

Date: 2012-04-25



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2009

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB μ V)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1203056

Page 10 of 74

Date: 2012-04-25




A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Charging Mode

Results: Pass

Please refer to following diagram for individual

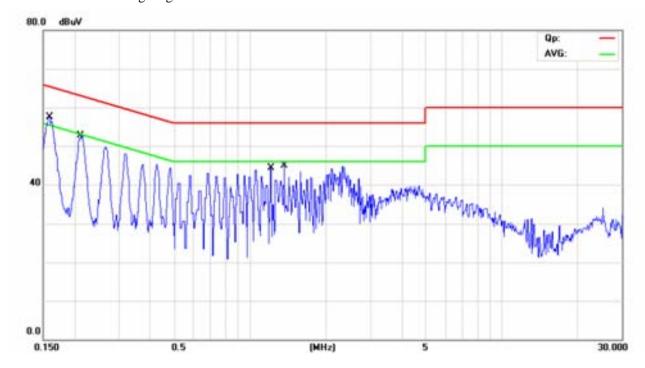

Fraguency	Reading(dB μ V)			Fraguenay			Limi	t
Frequency (MHz)	Line	2	Neutral		(dB µ V)			
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average		
0.159	54.61	26.21			65.50	55.50		
1.375	40.05	15.35			56.00	46.00		
0.212	46.47	24.57			63.11	53.11		
1.218	34.19	15.59			56.00	46.00		

Report No: 1203056

Page 11 of 74

Date: 2012-04-25




B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Charging Mode

Results: Pass

Please refer to following diagram for individual

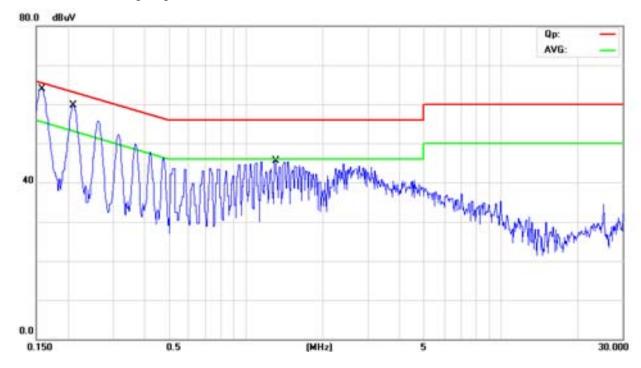

Fraguanay	Reading(dB µ V)			Limit		
Frequency (MHz)	Live	;	Neutral (dB µ		Neutral $(dB \mu V)$	
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.158			60.51	32.41	65.57	55.57
0.211			54.17	16.77	63.15	53.15
1.310			23.72	5.92	56.00	46.00

Report No: 1203056

Date: 2012-04-25



Page 12 of 74

6. Frequency Tolerance

6.1 Applicable standard

According to FCC Part 90 Section 90.213, In the 421–512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. In the 150–174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 5.0 ppm.

6.2 Measurement Procedure

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 60°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 3.7-4.2 V
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Report No: 1203056 Date: 2012-04-25



6.3 TEST SETUP BLOCK DIAGRAM

Receiver Monopole Antenna EUT Variable DC Power Supply

Figure 1

6.5 TEST RESULT

(1) Frequency stability versus input voltage (battery operation end point voltage is 6.5V)

VHF Band:

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	6.5V	173.97526	1.49	173.975MHz	5.0
Middle channel	6.5V	155.00038	2.44	156.025MHz	5.0
Bottom channel	6.5V	136.02535	2.57	136.025MHz	5.0

UHF Band:

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
Top channel	6.5V	479.97587	1.81	479.975MHz	2.5
Middle channel	6.5V	440.00073	1.66	440.000MHz	2.5
Bottom channel	6.5V	400.02567	1.67	400.025MHz	2.5

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1203056 Page 14 of 74

Date: 2012-04-25



(2)Frequency stability versus ambient temperature

Test Results UHF Band:

Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	479.97528	0.58	479.975MHz	2.5
40	7.4	479.97535	0.72	479.975MHz	2.5
30	7.4	479.97526	0.54	479.975MHz	2.5
20	7.4	479.97531	0.64	479.975MHz	2.5
10	7.4	479.97522	0.45	479.975MHz	2.5
0	7.4	479.97525	0.52	479.975MHz	2.5
-10	7.4	479.97538	0.79	479.975MHz	2.5
-20	7.4	479.97535	0.72	479.975MHz	2.5
-30	7.4	479.97532	0.66	479.975MHz	2.5

Middle channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	440.00078	1.77	440.000MHz	2.5
40	7.4	440.00056	1.27	440.000MHz	2.5
30	7.4	440.00067	1.52	440.000MHz	2.5
20	7.4	440.00056	1.27	440.000MHz	2.5
10	7.4	440.00029	0.65	440.000MHz	2.5
0	7.4	440.00072	1.63	440.000MHz	2.5
-10	7.4	440.00047	1.07	440.000MHz	2.5
-20	7.4	440.00062	1.41	440.000MHz	2.5
-30	7.4	440.00058	1.32	440.000MHz	2.5

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1203056 Page 15 of 74

Date: 2012-04-25



Bottom channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	3.7	400.02517	0.42	400.025MHz	2.5
40	3.7	400.02518	0.44	400.025MHz	2.5
30	3.7	400.02516	0.39	400.025MHz	2.5
20	3.7	400.02522	0.54	400.025MHz	2.5
10	3.7	400.02531	0.77	400.025MHz	2.5
0	3.7	400.02535	0.87	400.025MHz	2.5
-10	3.7	400.02535	0.87	400.025MHz	2.5
-20	3.7	400.02528	0.70	400.025MHz	2.5
-30	3.7	400.02526	0.65	400.025MHz	2.5

VHF Band:

Top channel

Environment Temperature(°C)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	173.97528	1.61	173.975MHz	5.0
40	7.4	173.97535	2.01	173.975MHz	5.0
30	7.4	173.97543	2.47	173.975MHz	5.0
20	7.4	173.97525	1.44	173.975MHz	5.0
10	7.4	173.97526	1.49	173.975MHz	5.0
0	7.4	173.97534	1.95	173.975MHz	5.0
-10	7.4	173.97536	2.07	173.975MHz	5.0
-20	7.4	173.97523	1.32	173.975MHz	5.0
-30	7.4	173.97535	2.01	173.975MHz	5.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1203056 Page 16 of 74

Date: 2012-04-25



Middle channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	155.00050MHz	3.22	155.000MHz	5.0
40	7.4	155.00033MHz	2.12	155.000MHz	5.0
30	7.4	155.00043MHz	2.77	155.000MHz	5.0
20	7.4	155.00038MHz	2.45	155.000MHz	5.0
10	7.4	155.00043MHz	2.77	155.000MHz	5.0
0	7.4	155.00055MHz	3.55	155.000MHz	5.0
-10	7.4	155.00029MHz	1.87	155.000MHz	5.0
-20	7.4	155.00029MHz	1.87	155.000MHz	5.0
-30	7.4	155.00052MHz	3.35	155.000MHz	5.0

Bottom channel

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(ppm)
50	7.4	136.02522	1.62	136.025MHz	5.0
40	7.4	136.02524	1.76	136.025MHz	5.0
30	7.4	136.02533	2.43	136.025MHz	5.0
20	7.4	136.02531	2.28	136.025MHz	5.0
10	7.4	136.02535	2.57	136.025MHz	5.0
0	7.4	136.02527	1.98	136.025MHz	5.0
-10	7.4	136.02528	2.06	136.025MHz	5.0
-20	7.4	136.02523	1.69	136.025MHz	5.0
-30	7.4	136.02526	1.91	136.025MHz	5.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: 1203056

Date: 2012-04-25



Page 17 of 74

7. EMISSION BANDWIDTH and Mask

7.1 PROVISIONS APPLICABLE

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P) dB$ or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two to three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (m) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, then an alternate procedure may be used provided prior Commission approval is obtained.

7.2 MEASUREMENT PROCEDURE


- 1). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz
 - 2). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
 - 3). Set SPA Max hold. Mark peak, -26 dB.

Report No: 1203056 Page 18 of 74

Date: 2012-04-25



7.3 Test Setup Block Diagram

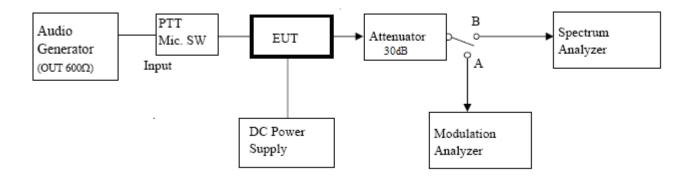

7.4 Measurement Result:

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
136.025MHz (Bottom)	9.1kHz	6.9kHz	11.25 KHz	Pass		
400.025MHz (Bottom)	9.1kHz	6.9kHz	11.25 KHz	Pass		

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
155.000MHz (Middle)	9.0kHz	6.8kHz	11.25 KHz	Pass		
440.000MHz (Middle)	9.1kHz	6.9kHz	11.25 KHz	Pass		

Bandwidth						
Operating Frequency	26dB Bandwidth	99% Bandwidth	Limits	Result		
173.975MHz (Top)	9.1kHz	6.8kHz	11.25 KHz	Pass		
479.975MHz (Top)	9.2kHz	7.0kHz	11.25 KHz	Pass		

Note: A 30dB attenuator was used during the tests

Report No: 1203056 Page 19 of 74


Date: 2012-04-25



7.5 Test Plots:

VHF Band- Bottom Channel

26dB Bandwidth

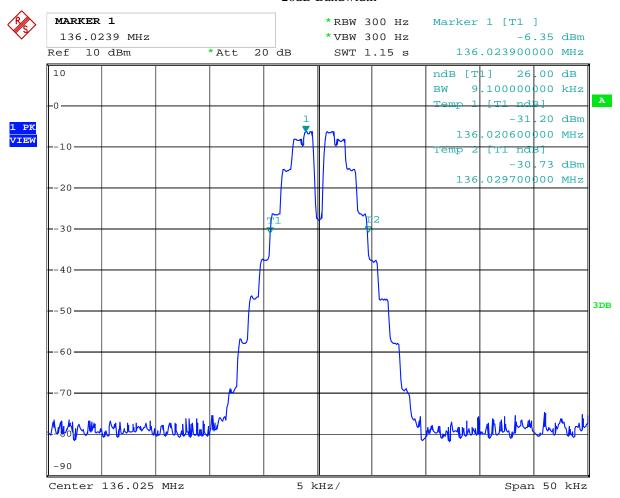

Date: 25.APR.2012 10:24:38


Report No: 1203056 Page 20 of 74

Date: 2012-04-25



VHF Band- Bottom Channel

99% Bandwidth

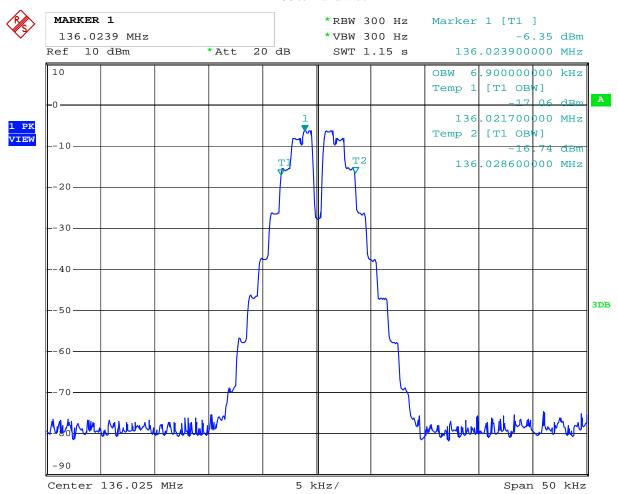

Date: 25.APR.2012 10:23:56


Report No: 1203056 Page 21 of 74

Date: 2012-04-25



VHF Band- Bottom Channel

Emission Mask

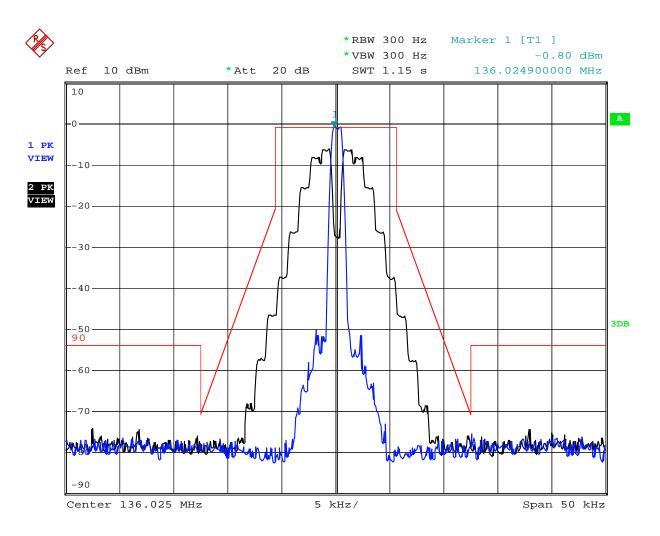

Date: 25.APR.2012 10:21:30


Report No: 1203056 Page 22 of 74

Report No: 1203056 Date: 2012-04-25



UHF Band- Bottom Channel

26dB Bandwidth

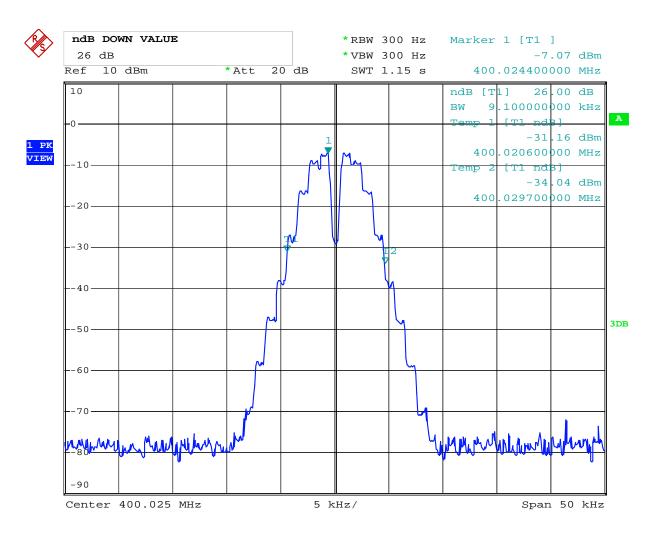

Date: 25.APR.2012 10:37:23

Report No: 1203056


Page 23 of 74

Date: 2012-04-25



UHF Band- Bottom Channel

99% Bandwidth

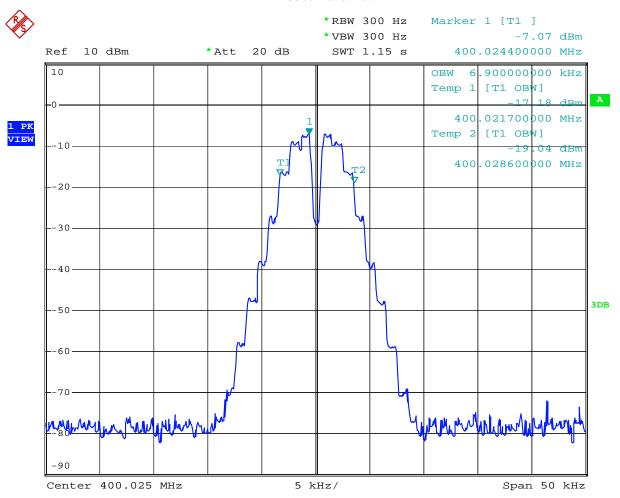

Date: 25.APR.2012 10:37:03


Report No: 1203056 Page 24 of 74

Date: 2012-04-25



UHF Band- Bottom Channel

Emission Mask

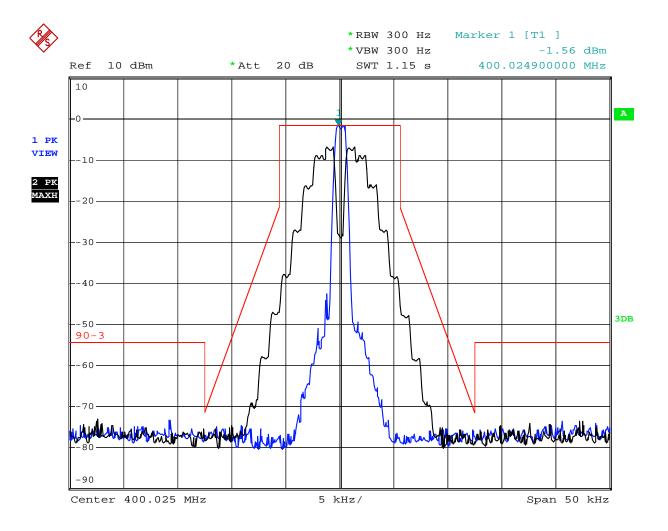

Date: 25.APR.2012 10:36:01


Report No: 1203056 Page 25 of 74

Date: 2012-04-25



VHF Band-Middle Channel

26dB Bandwidth

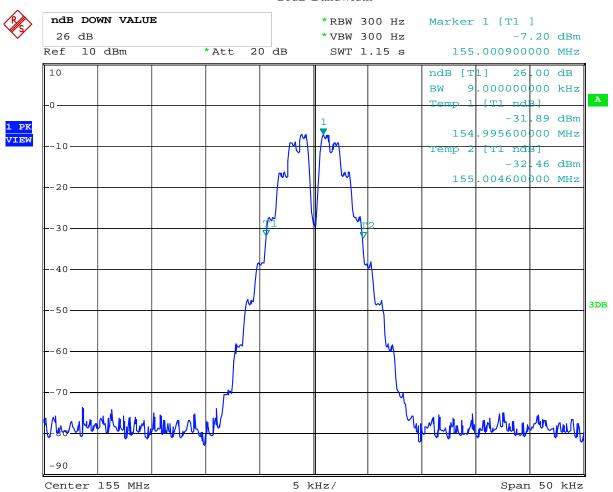

Date: 25.APR.2012 10:49:18


Report No: 1203056 Page 26 of 74

Date: 2012-04-25



VHF Band-Middle Channel

99% Bandwidth

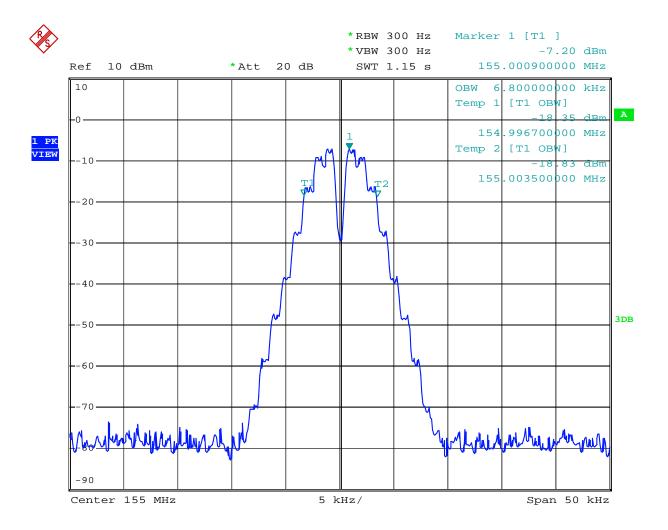

Date: 25.APR.2012 10:49:04


Report No: 1203056 Page 27 of 74

Date: 2012-04-25



VHF Band-Middle Channel

Emission Mask

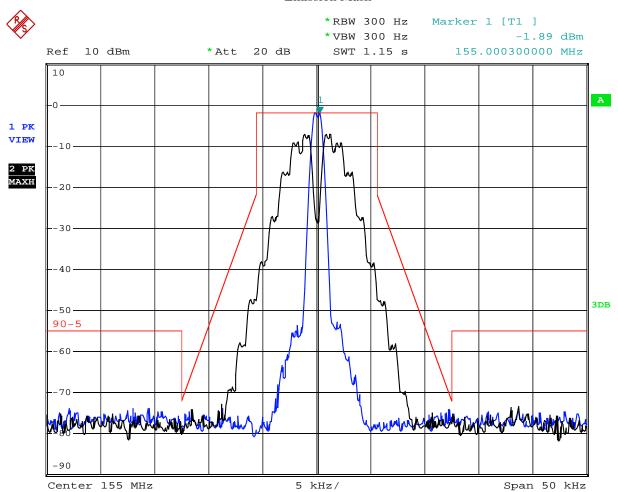

Date: 25.APR.2012 10:48:15


Page 28 of 74

Report No: 1203056 Date: 2012-04-25



UHF Band-Middle Channel

26dB Bandwidth

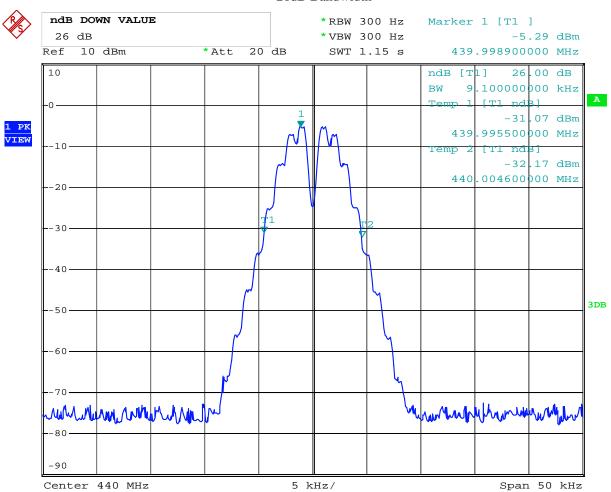

Date: 25.APR.2012 10:54:51


Report No: 1203056 Page 29 of 74

Date: 2012-04-25



UHF Band-Middle Channel

99% Bandwidth

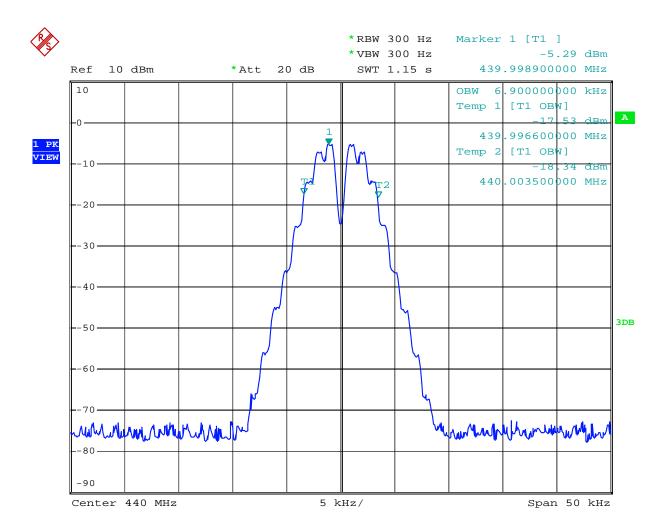

Date: 25.APR.2012 10:54:33


Report No: 1203056 Page 30 of 74

Date: 2012-04-25



UHF Band-Middle Channel

Emission Mask

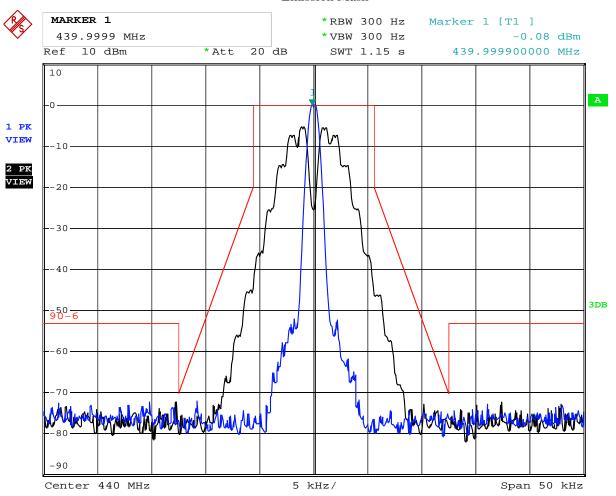

Date: 25.APR.2012 10:52:40


Page 31 of 74

Report No: 1203056 Date: 2012-04-25



VHF Band-Top Channel

26dB Bandwidth

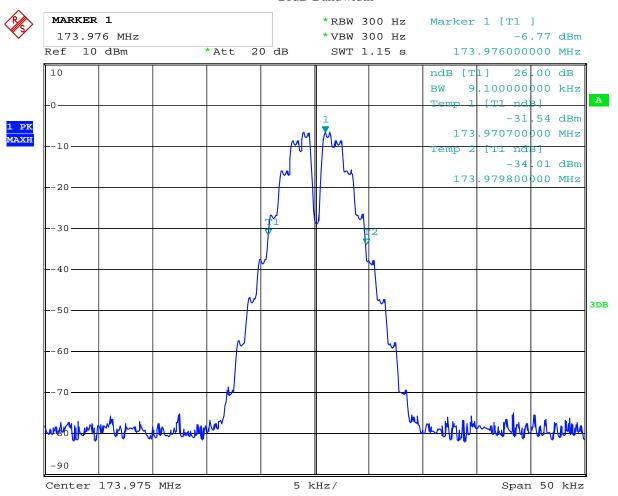

Date: 25.APR.2012 10:30:51


Report No: 1203056 Page 32 of 74

Date: 2012-04-25



VHF Band-Top Channel

99% Bandwidth

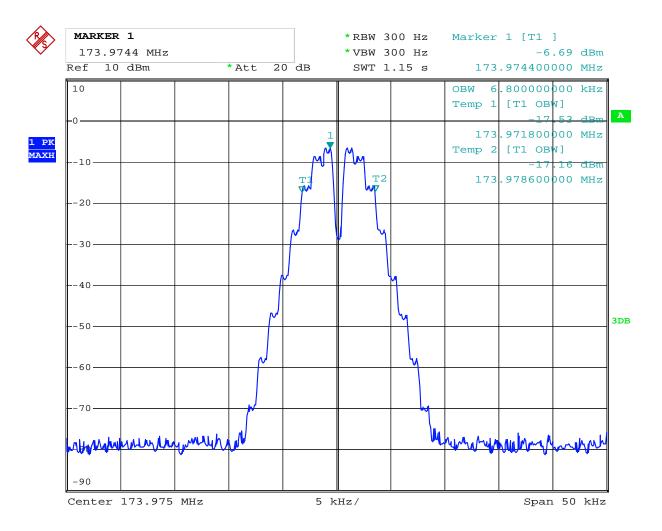

Date: 25.APR.2012 10:31:34


Report No: 1203056 Page 33 of 74

Date: 2012-04-25



VHF Band-Top Channel

Emission Mask

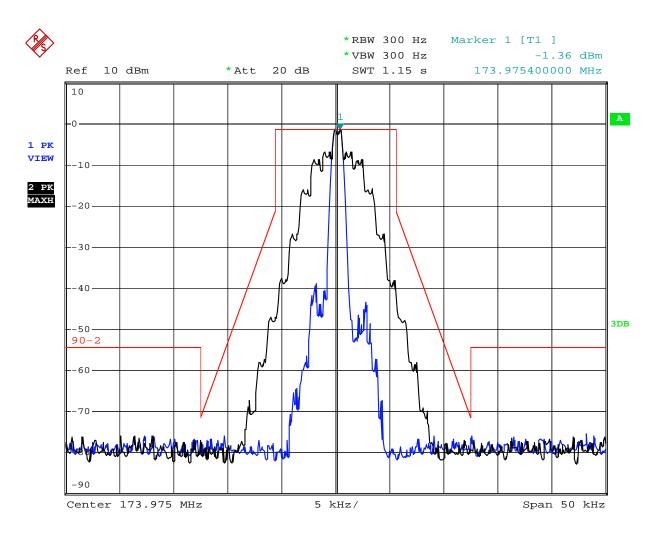

Date: 25.APR.2012 10:29:48


Page 34 of 74

Report No: 1203056 Date: 2012-04-25



UHF Band-Top Channel

26dB Bandwidth

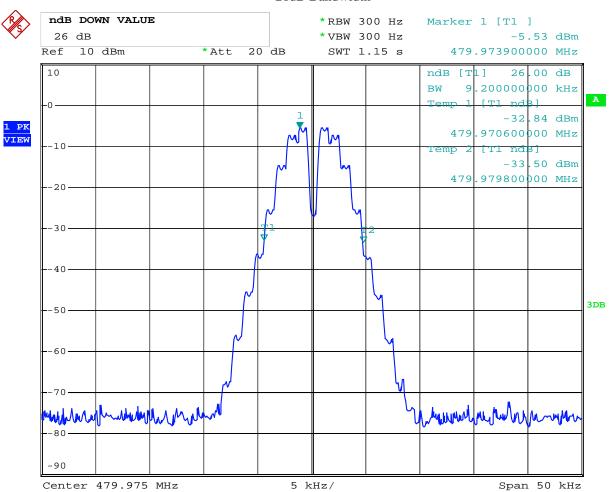

Date: 25.APR.2012 10:44:18


Report No: 1203056 Page 35 of 74

Date: 2012-04-25



UHF Band-Top Channel

99% Bandwidth

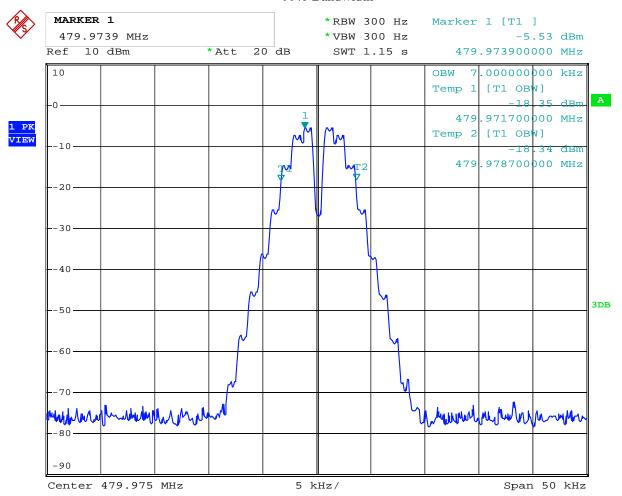

Date: 25.APR.2012 10:43:57

Report No: 1203056


Page 36 of 74

Date: 2012-04-25

TIMEWAY B

UHF Band-Top Channel

Emission Mask

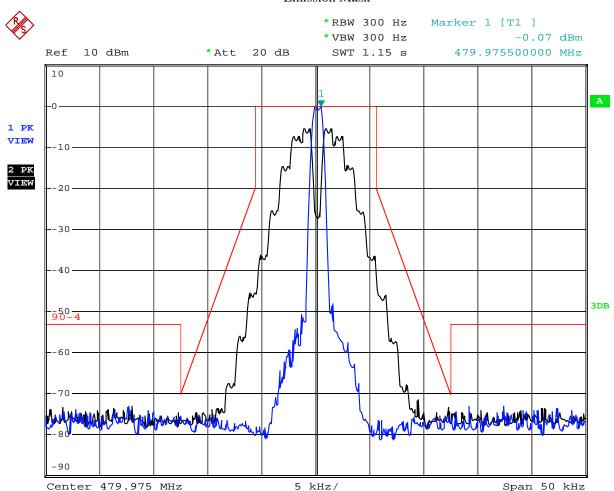

Date: 25.APR.2012 10:41:53

Report No: 1203056

Date: 2012-04-25



Page 37 of 74

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

- 8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:
 - (1) On any frequency from the centre of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz)of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is the lesser attenuation.

8.2 MEASUREMENT PROCEDURE (Radiated Emissions)

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

Report No: 1203056

Page 38 of 74


Date: 2012-04-25



(15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver and Gain of Substitution antenna.

- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver and Gain of Substitution antenna. So the EIRP is obtained.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 Test setup Block Diagram

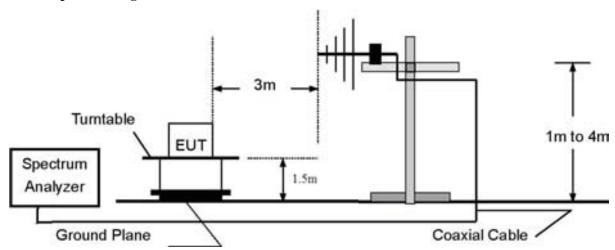

Page 39 of 74


Report No: 1203056 Date: 2012-04-25



8.4 Substitution Method: (Radiated Emissions)

Radiated Below 1GHz

Ground Plane

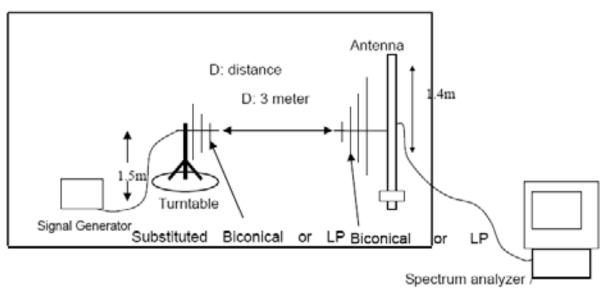

Radiated Above 1 GHz

Antenna mast D: distance 3 meters Horn antenna Substituted Horn antenna Substituted Horn antenna Spectrum antenna Spectrum analyzer/pre-amp

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-04-25



8.5 MEASUREMENT RESULTS:

Limit: $43 + 10 \log (P) dB$, (-13 dBm) Note: The results are peak values

VHF Band

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
272.05	Vertical	-36.2	-13
544.12	Vertical	-42.9	-13
272.05	Horizontal	-43.3	-13
544.12	Horizontal	-48.5	-13

Middle channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
310.01	Vertical	-34.8	-13
620.01	Vertical	-43.6	-13
312.01	Horizontal	-38.2	-13
620.01	Horizontal	-45.5	-13

Top channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
347.95	Vertical	-35.2	-13
521.93	Vertical	-44.7	-13
695.91	Vertical	-49.7	-13
347.95	Horizontal	-38.3	-13
521.93	Horizontal	-47.2	-13

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1203056 Page 41 of 74

Date: 2012-04-25



UHF Band

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
800.05	Vertical	-39.9	-13
1200.13	Vertical	-47.5	-13
800.05	Horizontal	-41.3	-13
1200.12	Horizontal	-48.6	-13

Bottom channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
880.01	Vertical	-37.8	-13
1320.03	Vertical	-45.2	-13
880.01	Horizontal	-39.5	-13
13020.03	Horizontal	-48.9	-13

Top channel

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
959.95	Vertical	-35.2	-13
1439.93	Vertical	-43.2	-13
959.95	Horizontal	-38.9	-13
1439.93	Horizontal	-45.8	-13

Report No: 1203056 Date: 2012-04-25



8.6 Conducted Emissions

8.6.1. Measurement Procedure

- 1). The eut antenna port connect to the spectrum analyzer through a attenuator.
- 2). Let the eut working in transmitter and used the spectrum to measure the conducted emission. 3). The output of the antenna shall be connected to the spectrum.

The setup of test receiver: Detector: Peak RBW: 120kHz for 30-1000MHz ,1MHz for above1GHz

VBW: 300kHz for 30-1000MHz 3MHz for above1GHz

8.6.2.Test Setup Block Diagram (block diagram of configuration)



8.6.3 Test Result

VHF Band

Bottom Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
272.05	-48.9	-13
408.08	-53.7	-13

Middle Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
310.01	-48.3	-13
465.01	-54.7	-13

Top Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
347.95	-50.2	-13
521.93	-54.2	-13

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1203056 Page 43 of 74 Date: 2012-04-25



UHF Band

Bottom channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)	
800.05	-52.5	-13	
1200.08	-59.6	-13	

Middle channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
870.05	-49.9	-13
1305.08	-59.3	-13

Top Channel

Frequency (MHz)	Emission (dBm)	Limit (dBm)
959.95	-52.1	-13
1439.93	-59.3	-13

Report No: 1203056 Date: 2012-04-25



Page 44 of 74

9. Modulation Characteristics

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). The EUT and test equipment were set up as shown in figure 2.
- (2). Adjust the Modulation Analyzer for the following setting:
 - a) High-pass filter : offb) Low-pass filter : 15 kHzc) Detector : positive peak
 - d) Function: FM
- (3). The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- (4). With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- (5). The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.

Report No: 1203056 Page 45 of 74
Date: 2012-04-25



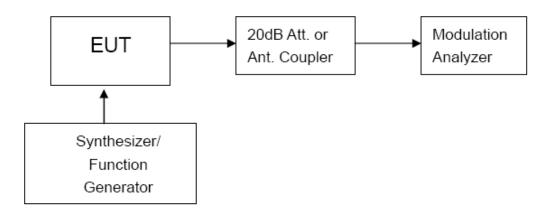


Figure 1: Modulation characteristic measurement configuration

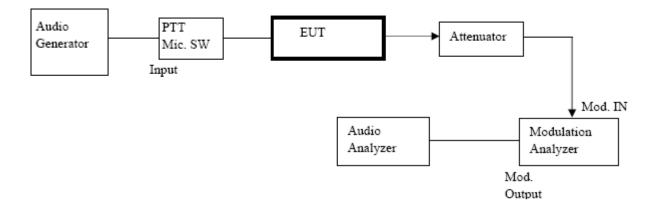


Figure 2: Audio Frequency Response Measurement Configure

Page 46 of 74

Date: 2012-04-25

Report No: 1203056




9.4 MEASUREMENT RESULT

(a). Modulation Limit:

Middle channel (For VHF Band)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.06	0.13	0.23	0.27
-15	0.07	0.20	0.30	0.51
-10	0.09	0.43	0.55	0.62
-5	0.12	0.66	0.93	1.17
0	0.16	1.25	1.41	1.62
+5	0.24	1.32	1.60	1.83
+10	0.34	1.52	1.77	1.89
+15	0.51	1.68	1.91	1.99
+20	0.65	1.85	2.09	2.10

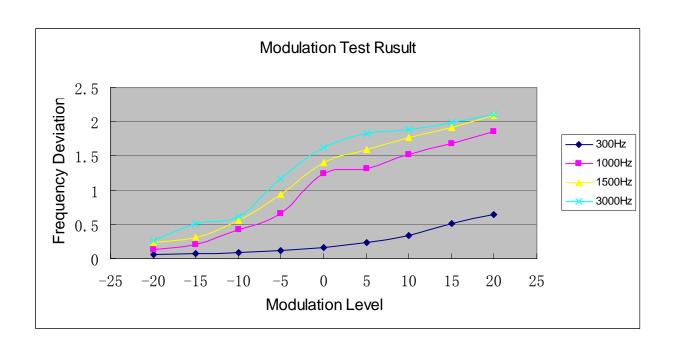


Report No: 1203056 Page 47 of 74

Date: 2012-04-25



(b). Audio Frequency Response:

For VHF Band

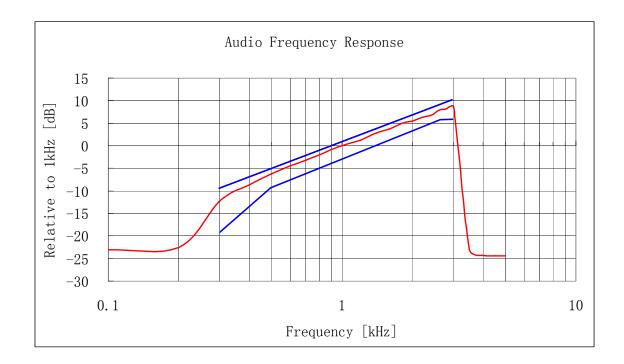


Report No: 1203056 Page 48 of 74

Date: 2012-04-25



Middle channel (For UHF Band)

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.05	0.22	0.32	0.35
-15	0.09	0.33	0.37	0.52
-10	0.11	0.53	0.61	0.72
-5	0.19	0.78	0.85	1.10
0	0.35	1.04	1.26	1.43
+5	0.48	1.16	1.55	1.76
+10	0.56	1.39	1.78	1.89
+15	0.63	1.56	1.92	2.10
+20	0.74	1.72	2.13	2.23

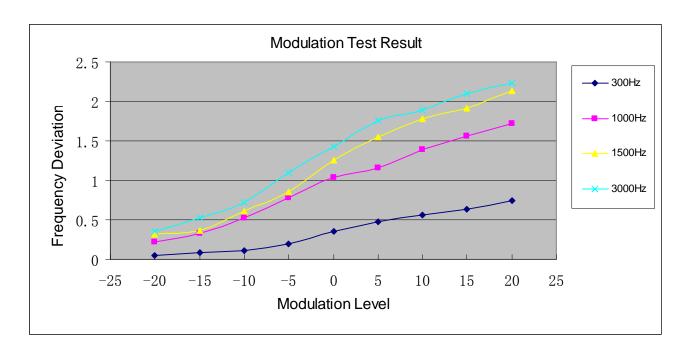


Report No: 1203056 Page 49 of 74

Date: 2012-04-25



(b). Audio Frequency Response:

For UHF Band

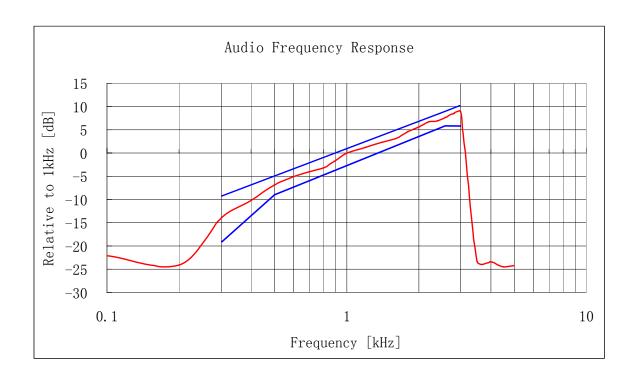

Report No: 1203056

Date: 2012-04-25



Page 50 of 74

10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum EIRP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.

Spectrum analyzer setting: RBW=10kHz, VBW=30kHz, PK detector

10.3 TEST RESULT

Calculation Formula: CP = R + A + L

* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

Conducted Power Measurement Results				
Channel Separation Channel Measurement Result (dBm)				
UHF Band	Bottom channel	31.51		
	Top channel	31.45		
VHF Band	Bottom channel	30.79		
	Top channel	31.19		

Report No: 1203056 Page 51 of 74 Date: 2012-04-25

11. RANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

> t3 is the time period from the instant when the transmitter is turned off until toff.

 $t_{\rm off}$ is the instant when the 1 kHz test signal starts to rise. 2 During the time from the end of t_2 to the beginning of t_3 ,

the frequency difference must not exceed the limits specified in § 90.213.

Time intervals 1,2	Maximum	All equi	All equipment	
	frequency difference ³	150 to 174 MHz	421 to 512 MHz	
•	ency Behavior for perate on 25 kHz		esigned to	
t ₁ ⁴ t ₂ t ₃ ⁴	±25.0 kHz ±12.5 kHz ±25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms	
•	ency Behavior for erate on 12.5 kHz		esigned to	
t ₁ ⁴ t ₂ t ₃ ⁴	±12.5 kHz ±6.25 kHz ±12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms	
Transient Freque	ency Behavior for	Equipment De	esigned to	

Operate on 6.25 kHz Channels

t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing. t_1 is the time period immediately following $t_{\rm on}$.

t₂ is the time period immediately following t₁.

Report No: 1203056 Page 52 of 74

Date: 2012-04-25




t₃ is the time period from the instant when the transmitter is turned off until toff.

- $t_{\rm off}$ is the instant when the 1 kHz test signal starts to rise. 2 During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- 3 Difference between the actual transmitter frequency and the assigned transmitter frequency.
- 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 Test Method

TIA/EIA-603 2.2.19

11.3 Test setup Block Diagram

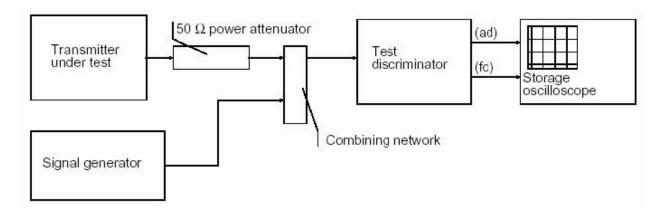


11.4 MEASURE RESULT

Report No: 1203056 Page 53 of 74

Date: 2012-04-25

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On at VHF Band

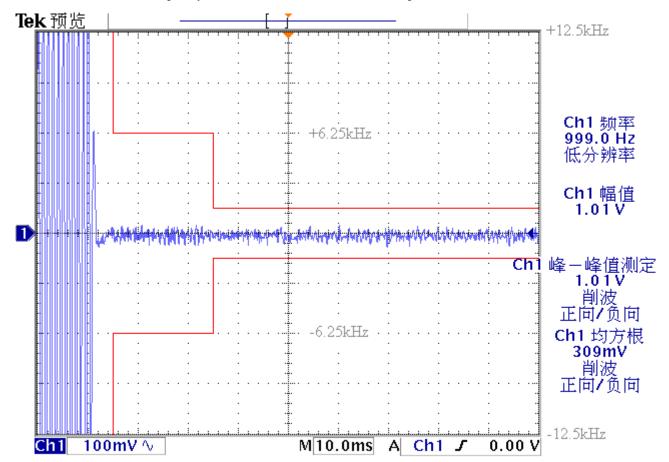


Report No: 1203056 Page 54 of 74

Date: 2012-04-25



Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation—On to Off at VHF Band

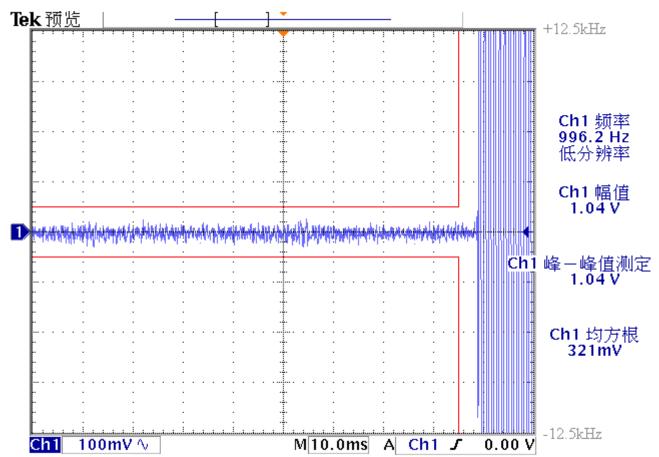


Report No: 1203056

Page 55 of 74

Date: 2012-04-25

tuneway #

Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation--Off to On at UHF Band

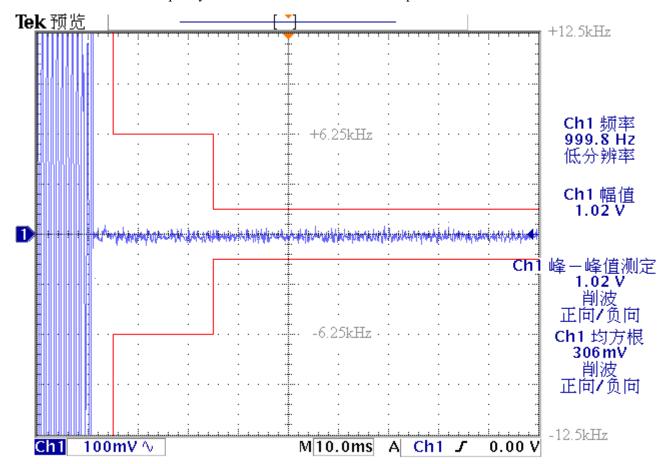


Report No: 1203056 Page 56 of 74

Date: 2012-04-25



Transmitter Frequency Behaviour @ 12.5 kHz Channel Separation—On to Off at UHF Band

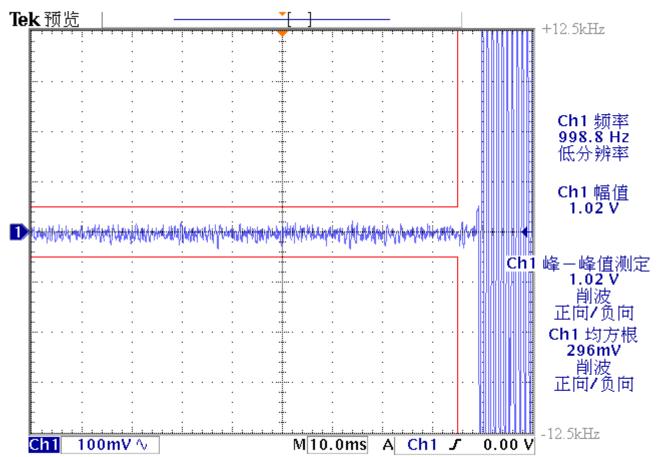

Report No: 1203056 Page 57 of 74 Date: 2012-04-25



12. Radiated Emission on Receiving Mode

12.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

12.2 TEST METHOD

ANSI C 63.4: 2003

12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

Date: 2012-04-25




Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx Transmitting

Operation Mode:

Results: Pass

Please refer to following diagram for individual

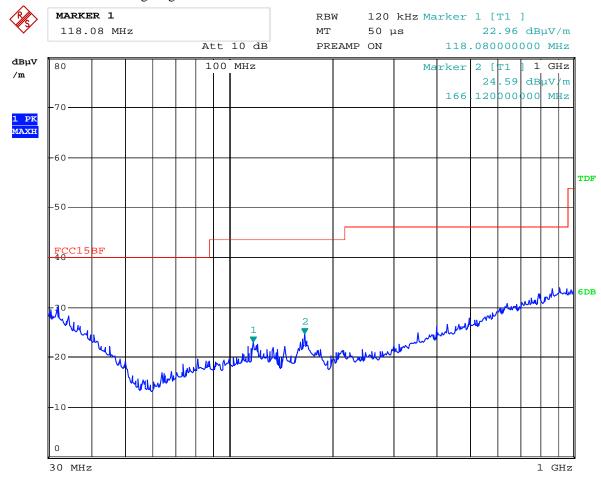

Date: 6.APR.2012 13:25:11

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
118.080	22.96	Н	43.50
166.120	24.59	Н	43.50

Report No: 1203056 Date: 2012-04-25




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Charging and Receiving

Results: Pass

Please refer to following diagram for individual

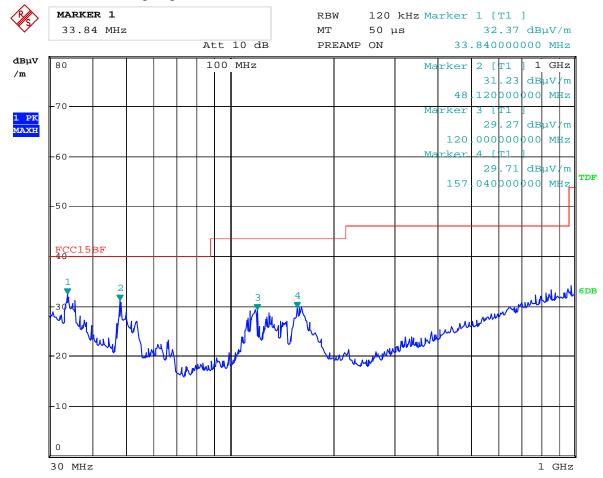

Date: 6.APR.2012 13:30:23

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
33.840	32.37	V	40.00
48.120	31.23	V	40.00
120.000	29.27	V	43.50
157.040	29.71	V	43.50

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1203056 Date: 2012-04-25 TIMEWAY TEATHS LABS

Page 60 of 74

13.0 RF Exposure

The threshold levels for SAR of PTT devices are given in Section 5 of KDB447498.

For held to face configuration the power threshold is 250mW. For occupational use the power is increased by a factor of five. For this PTT device, the maximum duty cycle is 50%. This results in a maximum peak power of 1.25W for held to face configuration.

For body worn operation a power threshold according to table 1 of KDB447498 applies. The power threshold for body worn devices with 1.5cm distance is 200mW. For occupational use a factor of five is applied and a duty factor of 50% can be assumed. This results in a power threshold of 1W.

The device with half of maximum power of 0.891W which is less than the power threshold of 1W and maximum duty cycle of 50% and frequencies below 500MHz can be certified without SAR test according to the above considerations.

Note: The value of 0.891W is the half of calculated EIRP with 100% duty cycle

Maximum EIRP=31.51+antenna Gain=31.51+1.0dBi=32.51dBm (UHF Band)

Maximum EIRP=31.19+antenna Gain=31.19+1.0dBi=32.19dBm (VHF Band)

Report No: 1203056 Page 61 of 74

Date: 2012-04-25



14.0 FCC ID Label

FCC ID: ZP5BF-5R

This device complies with part 15 and 90 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 62 of 74

Report No: 1203056 Date: 2012-04-25



15.0 Photo of testing

15.1 Conducted test View--



15.2 Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 63 of 74

Report No: 1203056 Date: 2012-04-25



Spurious Radiated Emissions test View--



Spurious Radiated Emissions test View--



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 64 of 74

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 65 of 74

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 66 of 74

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier of others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 67 of 74

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 68 of 74

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1203056 Date: 2012-04-25



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 70 of 74

Report No: 1203056 Date: 2012-04-25



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 71 of 74

Report No: 1203056 Date: 2012-04-25



Interior View



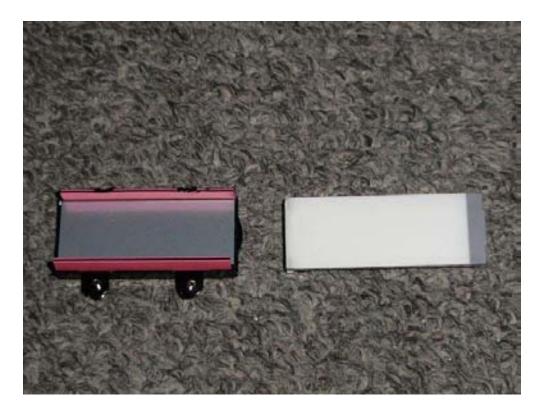

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier of others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 72 of 74

Report No: 1203056 Date: 2012-04-25



Interior View

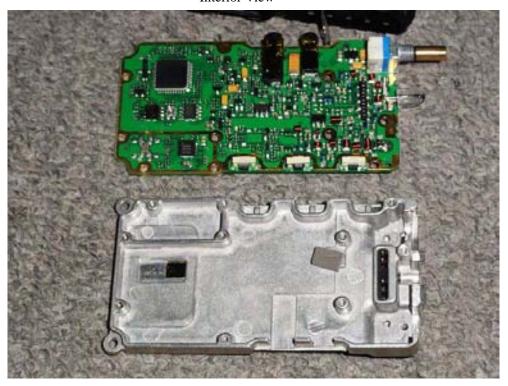



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier of others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 73 of 74

Report No: 1203056 Date: 2012-04-25



Li-ion Battery Charger:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 74 of 74

Report No: 1203056 Date: 2012-04-25



Adapter:



-End of the report-